




NTH 14-E800

Preassembled system with condensate minipump

It is a ready-to install pump-system to remove the condensate. The wall mounting allows to install the tank on the left or the right of the air-conditioning unit.

The alarm signal has two contacts NO/NC

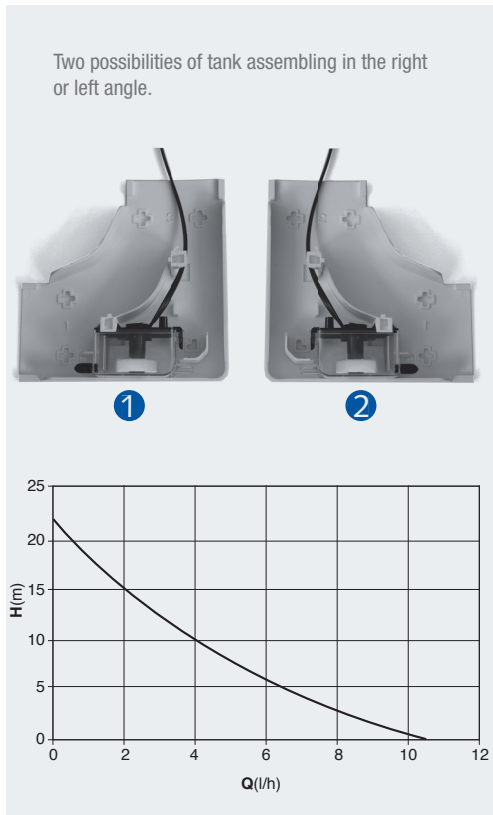

Max 15 kW Sound level 21dBA

Code	Article	Description
SP04090148	NTH 14-E800	Preassembled system with condensate minipump

Technical data

- Max flow 11 l/h
- Max suction 2m
- Max head 22m
- Duct 80x60x970 mm
- Voltage 230V - 50Hz
- Max rated current 50 mA
- Alarm contacts NC-NA 10A Resistive 250V
- Weight 1,6 Kg
- Stainless steel inlet filter..... Ø0,2 mm
- Protection class IP20
- Certification..... CE
- RoHS 2 compliant

